

# Direct Color Systems®

## SMALL-FORMAT UV LED FLATBED PRINTERS

VERSATILE MAX-VOLUME, SMALL-FORMAT SOLUTIONS WITH  
INDUSTRY-LEADING PRINT QUALITY, SPEEDS AND CAPABILITIES

**FEATURING** INLINE PRINTING | ADA-COMPLIANT/BRAILLE SIGNAGE | CYLINDRICAL PRINTING



### UNMATCHED CAPABILITIES

- >> TEXTUR3D™ 3-dimensional prints for a unique look and feel, plus standard flat prints
- >> Produces ADA-compliant/Braille signage (Patented)
- >> Cylindrical object and bottle printing made easy with the EasyCyl attachment\*
- >> Printable area: up to 10" x 24" (254mm x 610mm)
- >> Models vary with fully adjustable heights to accommodate substrates from 0" to 2" (51mm), 4" (102mm), 6" (152mm) and 15" (381mm)
- >> Print on wood, metals, ceramic tiles, plastics, glass, industrial parts, promotional products and so much more!
- >> F4 Editions capable of printing directly to light & dark colored t-shirts and garments (patent pending)

### OPTIMIZE YOUR PRODUCTION


- >> Inline printing – print any combination of white, color and clear print head channels simultaneously, inline, in a single pass
- >> Bulk Ink System™ – Unlike single-use cartridges, this system allows for 100% utilization of available ink
- >> White Ink Circulation System – Programmable and automatic circulation of the entire white ink tank and lines
- >> ACS™ – UV print head anti-cure system
- >> LED sensors automatically adjust head height to reduce print head strikes
- >> Made in the USA – distributed globally

INCLUDED RIP 10 SOFTWARE INTEGRATES SEAMLESSLY WITH INDUSTRY-STANDARD DESIGN PROGRAMS (PHOTOSHOP®, ILLUSTRATOR®, COLOR BYTE, CORELDRAW®)

\* Not available on model 1018UMVP2.

### SUPREME PRINT QUALITY

- >> Y-axis absolute positioning accuracy and repeatability of  $\pm 0.0015"$  (.038mm) when utilizing the Y-axis Heavy-Duty Direct Drive Module
- >> Precision Dot Control™ provides industry-leading print quality
- >> White UV ink creates a very opaque image, allowing you to print vibrant colors onto virtually any colored or transparent substrate
- >> UV LED inks offer outstanding solvent and abrasion durability – 6-color ink set, including clear and white

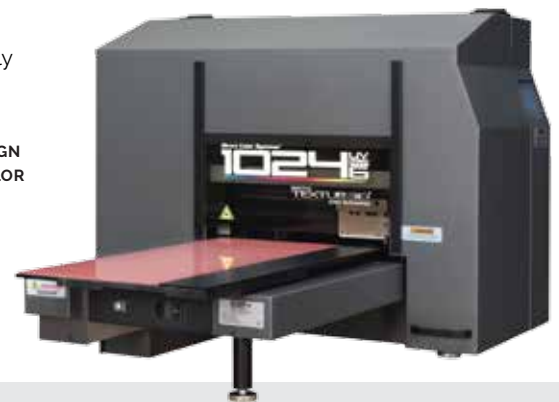

LCD TOUCH SCREEN PROVIDES INTERACTIVE,  
ON-DEMAND PRINTER STATUS AND INK LEVELS

Direct Color Systems®  
**1024** UV  
MVP 15

Direct Color Systems®  
**1024** UV  
MVP 16

Direct Color Systems®  
**1024** UV  
MVP 17

Direct Color Systems®  
**1018** UV  
MVP 2

JOHNSONPLASTICS  
PLUS

JPPLUS.COM • 480-566-2414 • Steve Gluskin • [sgluskin@jpplus.com](mailto:sgluskin@jpplus.com)

# SMALL-FORMAT UV LED FLATBED PRINTERS

ALL MODELS ARE AVAILABLE IN STANDARD IR2 OR F4 EDITIONS  
ECONOMICAL HEAD REPLACEMENT COST | ADJUSTABLE POWER OUTPUT FOR UV LED LAMP

## DIRECT JET UVMVP SERIES UV LED PRINTER SPECIFICATIONS

IMAGING PROCESS	On-demand inkjet (Micro Piezo) 8-channel head with 180 nozzles/inch/channel
RESOLUTION	Draft Modes <sup>1</sup> : 360 x 360, 720 x 360, 720 x 720 dpi / Production Modes <sup>2</sup> : 1440 x 720, 1440 x 1440, 2880 x 1440, 5760 x 1440 dpi
INK DROPLET SIZE (MINIMUM / MAXIMUM)	1.5 picoliters / 21 picoliters
INK COLORS	C, M, Y, K, Cl, W, W (Cl=Clear, W=White)
BULK INK SYSTEM™	Refillable 300ml tanks
PRINT SPEED <sup>3</sup>	110 to produce a bi-directional 8' x 10' (203mm x 254mm) image at 1440 x 720 dpi / High Speed 306 to produce a bi-directional 10' x 24' (254mm x 610 mm) image at 1440 x 720 dpi / High Speed
Y-AXIS ABSOLUTE POSITIONING ACCURACY & REPEATABILITY	±0.0015" (.038mm) <sup>4</sup>
PRINT DIRECTION	Uni- and bi-directional
MAXIMUM PRINT SIZE	1024UVMVP15, 1024UVMVP6 & 1024UVMVP4: 10' x 24' (254mm x 610mm) / 1018UVMVP2: 10' x 18' (254mm x 457mm)
MAXIMUM SUBSTRATE SIZE	1024UVMVP15, 1024UVMVP6 & 1024UVMVP4: 13' x 25' (330mm x 635mm) / 1018UVMVP2: 13' x 19' (330mm x 483mm)
MAXIMUM SUBSTRATE WEIGHT	10 lbs. (4.5 kg). Optional heavy-duty Direct Drive Stepper Module increases maximum substrate weight to 30 lbs. (13.6 kg)
Z-AXIS (DEPTH/THICKNESS CONTROL)	1024UVMVP15: 0' to 15' (381mm) / 1024UVMVP6: 0' to 6' (152mm) / 1024UVMVP4: 0' to 4' (102mm) / 1024UVMVP2: 0' to 2' (51mm). Fully adjustable with automatic LED sensing technology.
MEDIA	Prints to a variety of substrates <sup>5</sup> using the DCS Multisolve LED UV IR2 or IRF4 ink set, including (but not limited to) plastic, glass, wood, ceramic, metal, etc. IRF4 ink prints to t-shirts, belts, bags and more. <sup>6</sup>
CONTROL PANEL	3.5" (89mm) Color LCD Touch Screen Display
INTERFACE	Hi-speed USB 2.0
WINDOWS OPERATING SYSTEM	Windows 7 (32 & 64 bit), Windows 8 (32 & 64 bit) or Windows 10 (32 & 64 bit)
SYSTEM MINIMUM REQUIREMENTS	CPU of >3GHz, 8GB RAM, 100 GB free hard disk space and 4 available USB 2.0 ports
POWER SOURCE	100-240 VAC, 50-60 Hz., 4 A auto switching
OPERATING TEMPERATURE	60°F to 85°F (16°C to 29°C)
HUMIDITY	Non-condensing 20%-80%
DIMENSIONS	1024UVMVP6, 1024UVMVP4, 1018UVMVP2: Depth 31.8" (806.7mm) x Height 25.5" (647mm) x Width 48.8" (1239.4mm). Height of 40.8" (1036mm) when cover is fully opened. 1024UVMVP15: Depth 31.8" (806.7mm) x Height 33.9" (861mm) x Width 48.8" (1239.4mm). Front cover is removal for service accessibility.
WEIGHT	1024UVMVP15: 241 lbs. (109 kg) / 1024UVMVP6: 231 lbs. (104 kg) / 1024UVMVP4: 231 lbs. (104 kg) / 1018UVMVP2: 221 lbs. (10 kg)
AGENCY LISTINGS	CE pending
WARRANTY	Printer 2-year limited warranty
RIP	Color Byte RIP 10 software allows input from Photoshop®, Illustrator®, CorelDRAW® and Color Byte
INK AND MEDIA	Available through Direct Color Systems and authorized dealers / distributors

<sup>1</sup> Not available on model 1018UVMVP2. <sup>2</sup> Substrate dependent. <sup>3</sup> Print times may vary dependent on computer configuration. <sup>4</sup> When utilizing the Y-axis Heavy-Duty Direct Drive Module. <sup>5</sup> All substrates should be tested for image receptivity, adhesion and durability, with final acceptance and suitability determined by the customer. <sup>6</sup> Some materials may require the use of an adhesion promoter or a chemical wipe prior to printing to promote adhesion. <sup>7</sup> To prevent contamination of the ink system, operators of the machine must only use the compatible ink specified for each machine. Failure to do so will harm the machine and void the warranty.

This data sheet is for informational purposes only. Direct Color Systems makes no warranties, expressed or implied in this summary. Specifications are subject to change without notice. This is not an offer for sale.

**DCS CORPORATE** 99 HAMMER MILL ROAD, ROCKY HILL, CT USA 06067  
800-693-6376 | +1 860-829-2244 | INFO@DIRECTCOLORSYSTEMS.COM

**DCS EAA** RUA DO ALTO DAS TORRES 942, 4430-009 VILA NOVA DE GAIA, PORTUGAL  
EAAINFO@DIRECTCOLORSYSTEMS.COM

**4<sup>th</sup> EDITION**  
NOW AVAILABLE

With IRF4 inks, cracking and peeling of prints is eliminated or minimized on flexible items<sup>7</sup>.

